



Aircom Supra Plus LED

Grado de protección / Protection degree / IP44



Luminaria concebida para aquellas aplicaciones donde antes se utilizaban los downlight circulares empotrables de Halogenuro Metálico (HQI), como concesionarios de automóviles, comercios, centros comerciales, supermercados etc. En general, para techos de alturas superiores a 3,5 metros.

Fabricado en aluminio inyectado y equipado con LEDs Osram Oslon SLL de Osram, con apertura de 80° y cierre transparente.

Disponible en diferentes temperaturas de color, LEDs para alimentación, así como la incorporación de drivers regulables y la posibilidad de suministrarlo con grado de protección IP65.


Luminaire designed for applications where previously were used the Metal Halide (HQI), circular recessed downlights, such as car dealerships, shops, malls, supermarkets etc. In general, for ceilings higher than 3.5 meters.

Made of cast aluminum and mounted with LEDs Osram Oslon SLL, with an opening degree of 80° and transparent closure.

Available in different color temperatures, LEDs for food application and the possibility to incorporate dimmable drivers and to supply it with IP65.

Aircon Supra Plus LED

Grado de protección / Protection degree / IP44

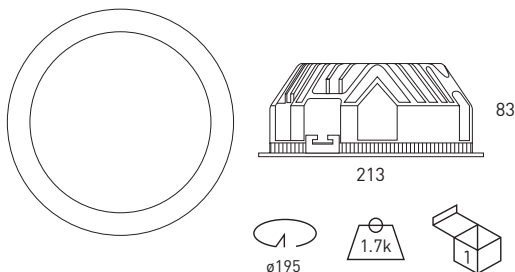

Aircon Supra Plus LED 60w / Aircom Supra Plus LED 60w

Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 65 84	Blanco / White	7020	60w
4227 02 65 84	Negro / Black	7020	60w
4227 03 65 84	Dorado / Gold	7020	60w
4227 05 65 84	Cromo / Chrome	7020	60w
4227 33 65 84	Dorado mate / Matt Gold	7020	60w
4227 52 65 84	Cromo mate / Matt Chrome	7020	60w
4227 55 65 84	Niquel mate / Nickel	7020	60w
4227 57 65 84	Niquel rayado / Nickel matt	7020	60w
4227 80 65 84	Satinado / Satin	7020	60w
4227 90 65 84	Titanio / Titanium	7020	60w

* Se suministra de manera estándar con LED 4000° K.

* Standardly supplied with 4000° K LED lamp.

OPCIONES / OPTIONS LED	Ref. 83	Ref. 84	Ref. 85
CRI>80 / Temperatura de color / Colour temperature	3000°K	4000°K	5700°K
Lum 60w	6780	7020	7020

Incremento respecto al driver / Rough price increase of driver


Ref. IP65	Índice de protección IP65 / Protection degree IP65
Ref. DR	Driver regulable 1-10V / Driver dimmable 1-10V
Ref. DRD	Driver regulable Dali / Driver dimmable Dali
Ref. DM8	Detector de movimiento integ. en luminaria / Motion detector Integrated in the luminaire
Ref. CF23	Mini control de flujo integ. en luminaria / Mini flux control Integrated in the luminaire
Ref. 3416	Kit de emergencia / Emergency kit
Ref. 4160	Driver para alimentar 12Vdc. / Driver to power 12 Vdc.
Ref. 416024	Driver para alimentar 24Vdc. / Driver to power 24 Vdc.
Ref. CRI90	CRI>90 [Solo para cierre transparente / Only for transparent closing]
Ref. AM	Pintura especial ambiente marino / Special marine environment paint

Rápida instalación.

Sustituye el downlight HQL por el Aircom Supra Plus LED de 60w.

Quick installation.

Aircon Supra Plus LED downlight replaces HQL downlight.

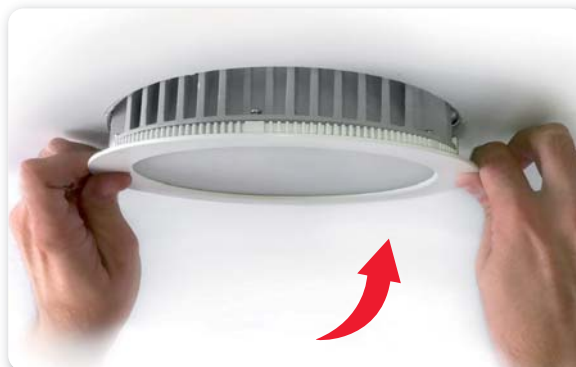

Incremento respecto a la lámpara / Rough price increase of lamp

Ref. **LPF** LEDs Pescado / Fish - 4000K - CRI>90

Ref. **LPB** LEDs Pan / Bread - 3000K - CRI>90

Ref. **LCM** LEDs Carne / Meat - 2700K - CRI>90

Ref. **LW** LEDs Verd. y fruta / Veg. and fruit - 4000K - CRI>90



Polígono Industrial la Estrella. C/ Marte 18-21
0500 Molina de Segura (Murcia) Spain - Buzón de correos nº11
Tlf.: 968 80 12 11 - Fax.: 968 89 10 48 - secom@secom.es
Dpto. Exportación. Tlf.: ++34-968-80 18 00. Fax.: ++34-968-89 10 48
export@secom.es



www.secom.es