

Aliket^{LED}

línea continua / linear lighting



-  LPF
-  LPB
-  LCM
-  LVV

LEDs alimentación
LEDs food



Aliket^{LED}

línea continua / linear lighting

Aliket LED, es una luminaria de línea continua que, gracias a su diseño elegante se adapta perfectamente a cualquier tipo de espacio comercial.

De gran rendimiento lumínico, Aliket LED es el resultado de la investigación, desarrollo e innovación de Secom Iluminación.

Cuerpo fabricado en aluminio extrusionado con recubrimiento de pintura al horno, consta de un sistema de instalación muy sencillo, en superficie o suspensión. Incluye selector de fase que permiten una amplia variedad de disposiciones lumínicas.

Aliket LED es muy versátil, dotada con la tecnología de LEDs Osram, Duris E5, para instalaciones a altura media y Oslon SSL para grandes alturas de montaje que, unido a su rendimiento y a nuestros diferentes sistemas de distribución del haz de luz, a los sistemas de regulación y kits de emergencia, dan lugar a una luminaria perfectamente adaptable a cualquier tipo de superficie.

Permite la posibilidad de diferentes ópticas, acabados, colores y temperaturas de color.

Aliket LED is a continuous line luminaire, whose elegant design, it fits perfectly in any kind of commercial area.

High light output, ALiket is the result of research, development and innovation of Secom Iluminacion.

Body made of extruded aluminum with baked paint coating with a very simple installation system, surface or suspended. It includes a phase selector that allows a wide range of lighting arrangements.

Versatile luminaire mounted with LED technology Osram Duris E5 for installations at medium altitude and Oslon SSL for high altitudes installations, which, together with their performance and different systems of distribution of the light beam, control systems and emergency kits, resulting in a luminaire perfectly adaptable to any kind of surface.

It allows the possibility of different optical, finishes, colors and color temperatures.

Aliket

Aliket | 600 mm



Aliket, cuenta con un selector de 4 posiciones, cada una conectada a una fase, que permite encender, apagar e incluso dejar sin corriente cada módulo de forma individual, sin afectar al resto de la línea. Esto permite una eficiencia energética óptima, adecuando la cantidad de luz necesaria.

Aliket mounts a 4 positions selector, each one connected to a phase, which allows to turn on, to turn off and even left without power each module individually, without affecting the rest of the line. This allows an optimum energy efficiency, adjusting the amount of light needed.



Aliket LED 600mm 20w óptica transparente / línea continua Aliket LED 600mm 20w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 1 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MC	Blanco/White	20W	2100	600x100,80x65,60

Aliket LED 600mm 20w óptica mate / línea continua Aliket LED 600mm 20w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 2 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MC	Blanco/White	20W	2100	600x100,80x65,60



Aliket LED 600mm 20w óptica asimétrica / línea continua Aliket LED 600mm 20w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Duris E5
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 3 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MC	Blanco/White	20W	2100	600x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

* Se suministra de manera estándar con LED 4000° K CRI>80.
* Standardly supplied with 4000° K LED CRI>80.



Aliket LED 600mm 30w óptica transparente / línea continua Aliket LED 600mm 30w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 1 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MC	Blanco/White	30W	3150	600x100,80x65,60

Aliket LED 600mm 30w óptica mate / línea continua Aliket LED 600mm 30w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 2 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MC	Blanco/White	30W	3150	600x100,80x65,60

Aliket LED 600mm 30w óptica asimétrica / línea continua Aliket LED 600mm 30w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 3 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 3 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MC	Blanco/White	30W	3150	600x100,80x65,60


Opciones / Options

Ref. **DRD** Driver regulable Dali / Dimmable driver Dali
Ref. **KE1** Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy
Ref. **KE3** Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy
Ref. **CRI90** CRI>90

Colores / Colours: Negro/Black [02] - Cromo mate/Matt chrome [52] - Titanio/Titanium [90]
Disponibile carta de colores RAL bajo pedido / RAL color chart available on request

Opciones / Options LED	Ref. 83	Ref. 84	Ref. 85	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°k	4000°k	5000°k	5700°k
20w Duris E5	2090	2100	-	2100
30w Oslon SSL	2730	3150	3150	-

Aliket | 1200 mm

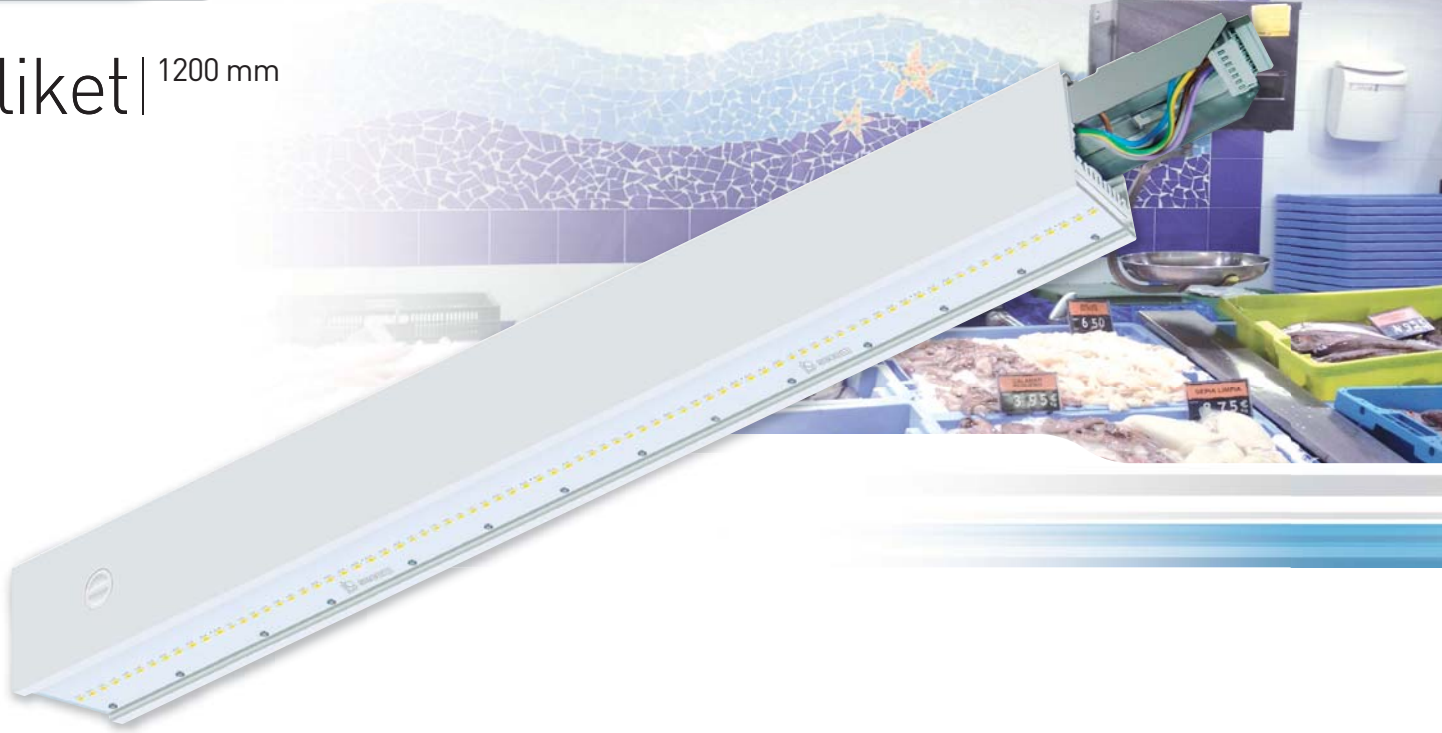

Aliket LED 1200mm 40w óptica transparente / línea continua
Aliket LED 1200mm 40w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 1 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MC	Blanco/White	40W	4200	1200x100,80x65,60

Aliket LED 1200mm 40w óptica mate / línea continua
Aliket LED 1200mm 40w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 2 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MC	Blanco/White	40W	4200	1200x100,80x65,60


Aliket LED 1200mm 40w óptica asimétrica / línea continua
Aliket LED 1200mm 40w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Duris E5
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 3 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MC	Blanco/White	40W	4200	1200x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

* Se suministra de manera estándar con LED 4000° K CRI>80.
* Standardly supplied with 4000° K LED CRI>80.



Aliket LED 1200mm 60w óptica transparente / línea continua
Aliket LED 1200mm 60w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 1 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MC	Blanco/White	60W	6300	1200x100,80x65,60

Aliket LED 1200mm 60w óptica mate / línea continua
Aliket LED 1200mm 60w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 2 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MC	Blanco/White	60W	6300	1200x100,80x65,60

Aliket LED 1200mm 60w óptica asimétrica / línea continua
Aliket LED 1200mm 60w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 3 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MC	Blanco/White	60W	6300	1200x100,80x65,60


Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali
Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy
Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy
Ref. CRI90 CRI>90

Colores / Colours: Negro/Black [02] - Cromo mate/Matt chrome [52] - Titanio/Titanium [90]
Disponibile carta de colores RAL bajo pedido / RAL color chart available on request

Opciones / Options LED	Ref. 83	Ref. 84	Ref. 85	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°k	4000°k	5000°k	5700°k
40w Duris E5	4180	4200	-	4200
60w Oslon SSL	5460	6300	6300	-

Aliket | 1500 mm

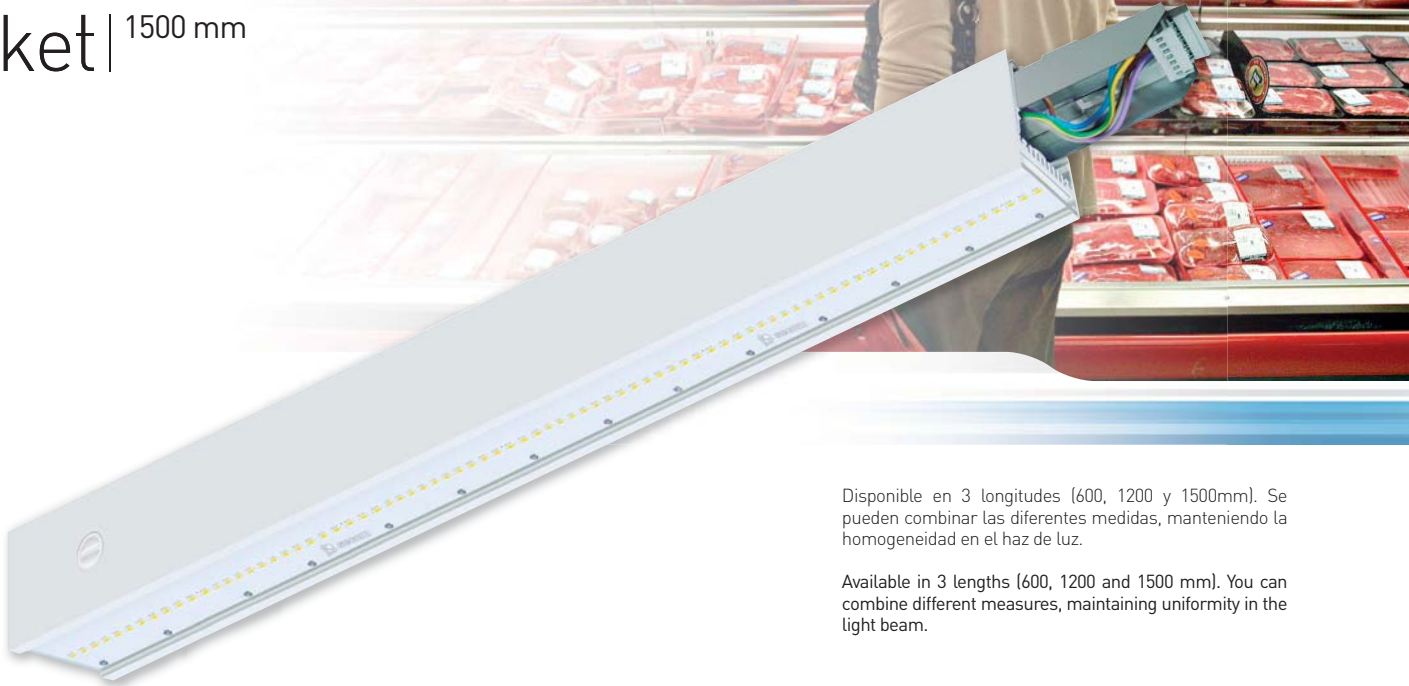

Disponible en 3 longitudes (600, 1200 y 1500mm). Se pueden combinar las diferentes medidas, manteniendo la homogeneidad en el haz de luz.

Available in 3 lengths (600, 1200 and 1500 mm). You can combine different measures, maintaining uniformity in the light beam.



Aliket LED 1500mm 50w óptica transparente / línea continua Aliket LED 1500mm 50w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 1 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

Aliket LED 1500mm 50w óptica mate / línea continua Aliket LED 1500mm 50w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 2 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

Aliket LED 1500mm 50w óptica asimétrica / línea continua Aliket LED 1500mm 50w asymmetric optical / linear lighting


Incluye driver, óptica asimétrica y LED Duris E5
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 3 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

* Se suministra de manera estándar con LED 4000° K CRI>80.

* Standardly supplied with 4000° K LED CRI>80.



Aliket LED 1500mm 75w óptica transparente / línea continua Aliket LED 1500mm 75w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 1 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

Aliket LED 1500mm 75w óptica mate / línea continua Aliket LED 1500mm 75w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 2 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

Aliket LED 1500mm 75w óptica asimétrica / línea continua Aliket LED 1500mm 75w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 3 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali

Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy

Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy

Ref. CRI90 CRI>90

Colores / Colours: Negro/Black (02) - Cromo mate/Matt chrome (52) - Titano/Titanium (90)

Disponibile carta de colores RAL bajo pedido / RAL color chart available on request

Opciones / Options LED

Ref.>80 / Temp. de color / Colour temperature	Ref. 83 3000°k	Ref. 84 4000°k	Ref. 85 5000°k	Ref. 85 5700°k
50w Duris E5	5486	5512	-	5512
75w Oslon SSL	7140	7386	7386	-

Aliket | accesorios / accessories


Suspensión / Suspension

Kit suspensión regulable, con regulación de altura
Adjustable suspension kit, with height adjustment

Ref.	Aliket	Long. cable Cable length	Unds. por luminaria Units per luminaire
6001	600mm	1200 mm	2
6002	600mm	2000 mm	2
6003	600mm	3000 mm	2
1201	1200mm	1200 mm	3
1202	1200mm	2000 mm	3
1203	1200mm	3000 mm	3
1501	1500mm	1200 mm	3
1502	1500mm	2000 mm	3
1503	1500mm	3000 mm	3



* Suspensión disponible en otras longitudes (bajo pedido)
* Suspension available in other lengths (on request)

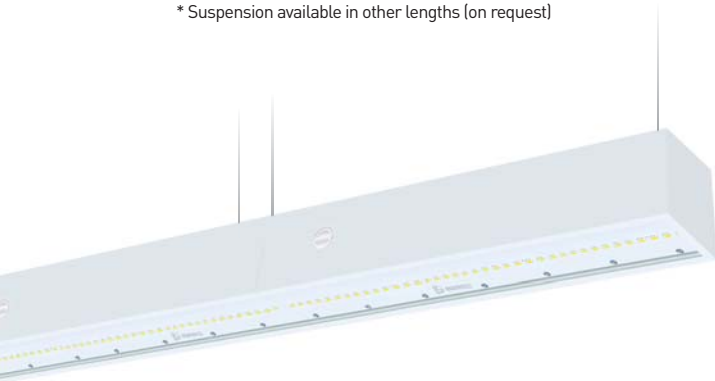

Tramo ciego / Stretch blind

Aliket tramo ciego
Aliket stretch blind

Ref.	Aliket	Tramo ciego Stretch blind
0060	600mm	MP
0061	600mm	MI
0062	600mm	MF
0120	1200mm	MP
0121	1200mm	MI
0122	1200mm	MF
0150	1500mm	MP
0151	1500mm	MI
0152	1500mm	MF

Módulo principio (MP), módulo intermedio (MI),
módulo final (MF), módulo cerrado (MC)
Initial module (MP), intermediate module (MI),
final module (MF), closed module (MC)



Pinza para superficie / Clamp surface

Pinza para superficie Aliket
Clamp surface Aliket

Ref.	Aliket	Unds. por luminaria Units per luminaire
0167 600	600mm	2
0167 120	1200mm	3
0167 150	1500mm	3



Fijación para varilla roscada Fixing for threaded rod

Fijación para varilla roscada M4
Fixing for threaded rod M4

Ref.	Aliket	Unds. por luminaria Units per luminaire
FVR6	600mm	2
FVR12	1200mm	3
FVR15	1500mm	3

Fijación para cadena Fixing for chain

Fijación para cadena 2x12mm
Fixing for chain 2x12 mm

Ref.	Aliket	Unds. por luminaria Units per luminaire
FC6	600mm	2
FC12	1200mm	3
FC15	1500mm	3

Kit cadena / Chain kit


Kit cadena 2x12mm.
Kit chain 2x12 mm.

Ref.	Aliket	Long. cadena Chain length	Unds. por luminaria Units per luminaire
6004	600mm	1000 mm	2
6006	600mm	2000 mm	2
6006	600mm	3000 mm	2
1204	1200mm	1000 mm	3
1205	1200mm	2000 mm	3
1206	1200mm	3000 mm	3
1504	1500mm	1000 mm	3
1505	1500mm	2000 mm	3
1506	1500mm	3000 mm	3



* Fijación disponible en otras longitudes (bajo pedido)
* Fixing available in other lengths (on request)

Aliket | accesorios / accessories

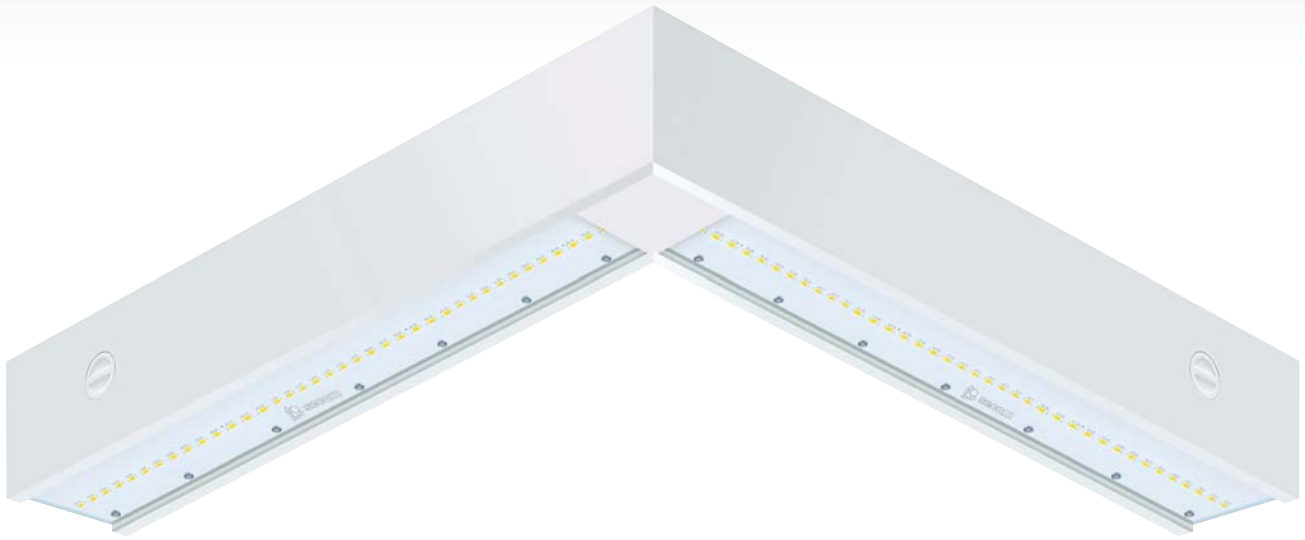

Codo 90° / 90° joint

Aliket LED codo 90° óptica transparente / línea continua
Aliket LED 90° joint transparent optical / linear lighting

Incluye driver, óptica transparente y LED
Includes driver, transparent optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 1 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 1 84	Blanco/White	60W	6300	665,6x665,6

Aliket LED codo 90° óptica mate / línea continua
Aliket LED 90° joint matt optical / linear lighting

Incluye driver, óptica mate y LED
Includes driver, matt optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 2 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 2 84	Blanco/White	60W	6300	665,6x665,6

Aliket LED codo 90° óptica asimétrica / línea continua
Aliket LED 90° joint asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED
Includes driver, asymmetric optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 3 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 3 84	Blanco/White	60W	6300	665,6x665,6

Opciones / Options

- Ref. **DRD** Driver regulable Dali / Dimmable driver Dali
- Ref. **KE1** Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy
- Ref. **KE3** Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy
- Ref. **CRI90** CRI>90

Colores/Colours: Negro/Black [02] - Cromo mate/Matt chrome [52] - Titanio/Titanium [90]
Disponble carta de colores RAL bajo pedido / Disponible carta de colores RAL bajo pedido


Opciones / Options LED

CRI>80 / Temp. de color / Colour temperature	Ref. 83 3000°k	Ref. 84 4000°k	Ref. 85 5000°k	Ref. 85 5700°k
40w Duris E5	4180	4200	-	4200
60w Oslon SSL	5460	6300	6300	-

Codo ciego / Blind joint

Aliket LED codo ciego
Aliket LED blind joint

Ref.	Color/Colour	Med./Measu.
0060 01 0	Blanco/White	125x125

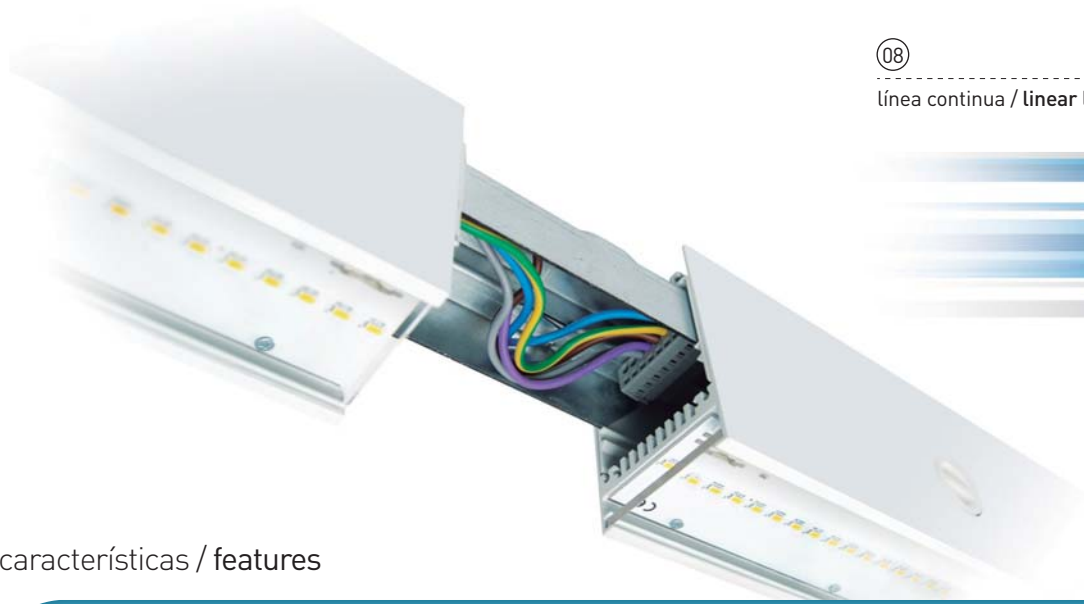

Aliket | características / features

- Estética elegante y moderna. Luminaria con un diseño versátil que se adapta perfectamente a todo tipo de espacios (comercios, educación, oficinas, industria y en cualquier tipo aplicación que se necesite iluminación mediante línea continua). Drivers integrados en el interior de cada módulo.
- Integración del cableado trifásico. Las luminarias incorporan el cableado para alimentar toda la línea de luminarias con tan solo un punto de alimentación.
- Todas las luminarias permiten seleccionar a que fase se conectan mediante un sencillo selector de posición, permitiendo con tres interruptores varios encendidos.
- Hasta 55 metros en una línea de luminarias con un solo punto de alimentación, para los módulos de 20w, 40w y 50w.

Hasta 45 metros en una línea de luminarias con un solo punto de alimentación, para los módulos de 30w, 60w y 75w.

Posibilidad de alargar la línea de luminaria añadiendo puntos de alimentación (bajo pedido).
- 3 longitudes, 600, 1200 y 1500 mm. combinables entre ellas.
- Mantenimiento sencillo. Gracias a que cada luminaria se puede desmontar sin necesidad de tocar las adyacentes, compuestas de dos partes es posible separar el grupo óptico del carril electrificado para la sustitución del equipo o la placa de led.
- Regulación Dali. Con opción de poder regular la luminosidad con protocolo digital dali, integrado en la luminaria.
- Alumbrado de emergencia. Posibilidad de incorporar luz de emergencia integrado en las luminarias con 1 o 3 horas de autonomía.
- Fotometrías diferentes. Se puede solicitar la luminaria con diferentes ópticas según la aplicación a iluminar, con difusor transparente, opal, asimétrica a dos lados o a un solo lado.
- 2 potencias por cada longitud, para poder cubrir diferentes alturas de instalación.
- Eficiencia 135 lúmenes/watios.
- Vida útil de 50.000 horas.

- Smart and modern aesthetic. Luminaire with a versatile design that fits perfectly in any kind of space (shops, education, offices, industry and in any kind of application that needs illumination through continuous line). Integrated drivers within each module.
- Integration of the three phase cabling. Luminaires incorporate the wiring to power the entire line of luminaires with only one power supply point.
- All light fittings allow to select which phase are connected by a single position switch, allowing with three switches, several ignitions.
- Up to 55 meters in a line of luminaires with a single point of supply for 20w, 40w and 50w modules.

Up to 45 meters in a line of luminaires with a single point of supply for 30w, 60w and 75w modules.

Possibility of extending the luminaire line, adding power points (on request).
- Three lengths, 600, 1200 and 1500 mm. interchangeable.
- Easy maintenance. Due to the fact that each luminaire can be dismantled without touching the adjacent ones, they are composed of two parts, and it is possible to separate the optical group for the electrified rail for replacement equipment or the LED module.
- Dali Regulation. With the option to regulate the brightness via digital dali protocol, which is integrated in the luminaire.
- Emergency lighting. Possibility of incorporating integrated emergency lighting in the luminaires with 1 or 3 hours of battery life.
- Different photometries. Luminaire can be ordered with different lenses depending on the application to illuminate, with transparent, opal or asymmetric diffuser on both sides or one side only.
- 2 powers per each length, to meet different installation heights.
- Efficiency 105 lumens / watt.
- Life span of 50,000 hours.

Aliket | características / features

LEDs para alimentación LEDs food

Realza y da vida a los alimentos It enhances and enlivens food



Ref. LPF



LED / Pescado
Fish

4000K
CRI >90

Ideales para pescado, la temperatura de color más fría aumenta la vistosidad del producto.

It is ideal for fish, colder color temperature increases the showiness of the product.



Ref. LPB



LED / Pan
Bread

3000K
CRI >90

Ideales para panes, repostería y quesos, destaca los colores cálidos aumentando los tonos amarillos y anaranjados.

It is ideal for breads, pastries and cheeses, it highlights warm colors, increasing the yellow and orange tones.



Ref. LCM



LED / Carne
Meat

2700K
CRI >90

Ideales para carnes, más agradable a la vista aumentando los colores rojos y rosados de tus productos.

It is ideal for meats, more pleasing to the eye by increasing the red and pink colors of the products.



Ref. LVV




LED / Verdura y Fruta
Vegetables and Fruit

4000K
CRI >90

Ideales para verduras y frutas, colores más llamativos y productos más frescos a la vista.

It is ideal for vegetables and fruits, more brilliant colors and fresher products at sight.

diagrama cromática
chromaticity diagram

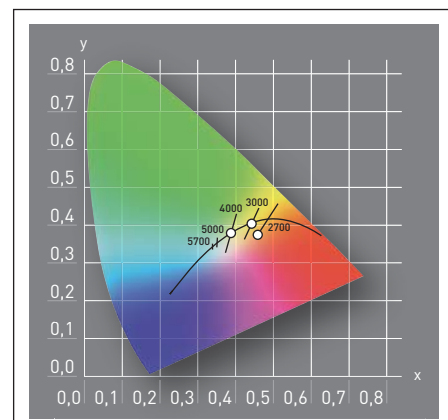

Aliket | instalación / installation

fácil instalación

Aliket, gracias a su innovador diseño hace que la unión de los módulos sea más fácil y sencillo, simplemente introduciendo el conector a la siguiente luminaria, así sucesivamente hasta completarla línea continua.

easy installation

Aliket, thanks to its innovative design, it makes the join of the modules easier and more simple, simply introducing the connector to the next luminaire, and so on, until the continuous line is completed.



instalación Aliket suspensión
installation suspension Aliket



unión de módulos
module joining


instalación kit suspensión
installation suspension kit

acoplar pinzas
coupling clamps

selección de fase
phase selector



instalación Aliket superficie
installation surface Aliket

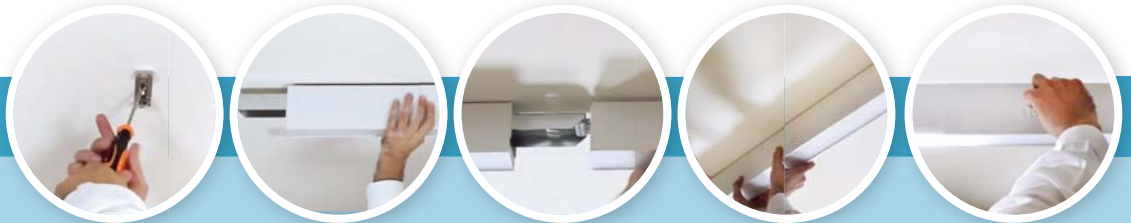

instalación pinzas
installation clamps

anclaje de módulos
anchoring modules




unión de módulos
module joining

selección de fase
phase selector




Aliket | curvas fotométricas / photometric curves



Duris E5 120°

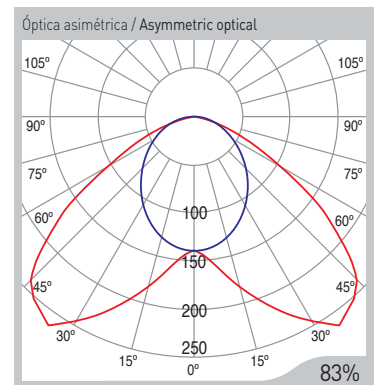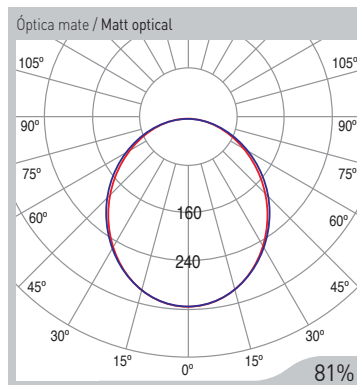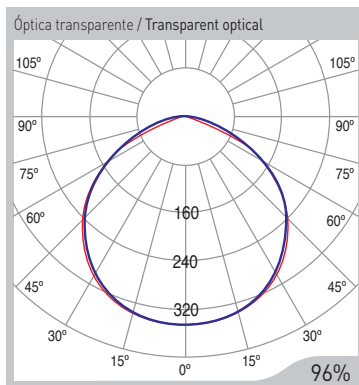

Oslon SSL 80°

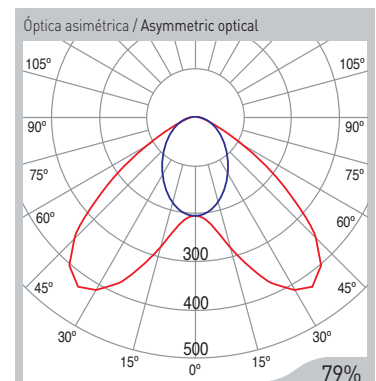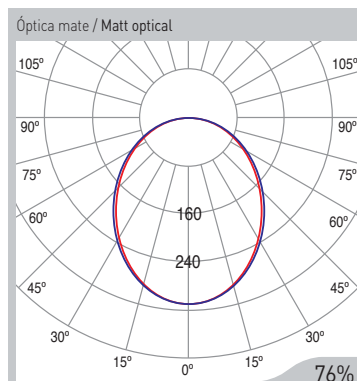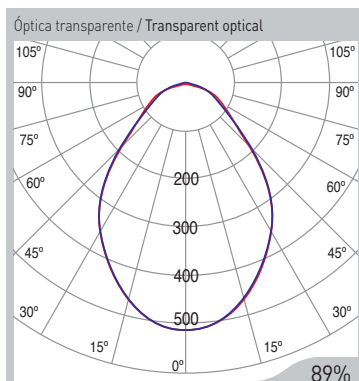

Boxter LED



Boxter LED carril / track

Boxter LED superficie / surface

Boxter LED empotrable / recessed

Konak LED



Kloss LED



Aircom 20w LED



empotrable / recessed

superficie / surface

Aircom Supra LED 30/40/60w



Emergencia Ergo LED





Los beneficios de las luminarias de LEDs de secom.

Ahorro energético por su alta eficiencia.
 Ahorro en mantenimiento de luminarias.
 Reproducción cromática (IRC) >80.
 Amplia gama en temperaturas de color.
 Amplia gama de medidas y de colores.
 Posibilidad de regular las luminarias.
 Ópticas de alto rendimiento.
 Fácil montaje e instalación.

The benefits of secom LED lighting fittings.

Energy-saving because of his high efficiency.
 Saving in maintenance.
 Cromatic reproduction (ICR) >80.
 Wide range of temperture colour.
 Wide range of measures and colours.
 Possibility of dimming the lighting fitting.
 High output optics.
 Easy installation.

¿Por qué trabajar con secom?

Fabricación nacional de todas sus luminarias de LEDs.
 Disponibilidad de todos los componentes de las luminarias de LEDs (disipadores, LEDs, circuitos, drivers, etc) para reposición.
 El mejor servicio en luminarias de LEDs, debido a la fabricación nacional y al gran stocks de componentes.
 Gran versatilidad en diseño, posibilidad de personalizar luminarias.
 Productos que cumplen la normativa europea vigente.
 Componentes Osram Duris E5 / Oslon SSL.
 Estricto control de calidad.
 Gran inversión en I+D+i para el desarrollo de flujos lumínicos y tecnologías de disipación de temperatura.
 PCB con fechador para verificar la vida media útil garantizada.

Why should you work with secom?

Own production of all our LED light fitting.
 Availability of all components of LEDs fittings (heat sink, LEDs, drivers, etc.) for replacement.
 The best service in the LEDs fitting due to the production in our own plants of production and large stock of components.
 Flexibility in design and possibility of customize the fittings.
 The product comply the European regulations CE.
 Components are Osram Duris E5 / Oslon SSL.
 Strict quality control.
 Big investment in R&D on development of luminus fluxes and temperature dissipation technologies.
 PCB with date of production for sponlife control.



secom

Polígono Industrial La Estrella. C/ Marte 18-21.
 30500 Molina de Segura. Murcia. Spain
 Tlf. 968 80 12 11 / Fax 968 89 10 48
 secom@secom.es

Dpto. Exportación.
 Tlf. ++34-968-80 18 00
 Fax. ++34-968-89 10 48
 export@secom.es



www.secom.es



Video Aliket



Fichas técnicas / Data sheet
 Aliket