

secom



COMPACT S2
downlight



TECHNOLOGY AND INNOVATION

COMPACT S2, circular recessed luminaire, elegant design and great visual comfort, with optimum results, both in terms of lighting and energy consumption, ideal for integration in domestic environments, offices, supermarkets, etc.




COMPACT S2

DOWNLIGHT




High-quality, energy-saving downlight, suitable for indoor installation.

Body made of die-cast aluminium and highly resistant PA thermoplastic diffuser.



CHARACTERISTICS

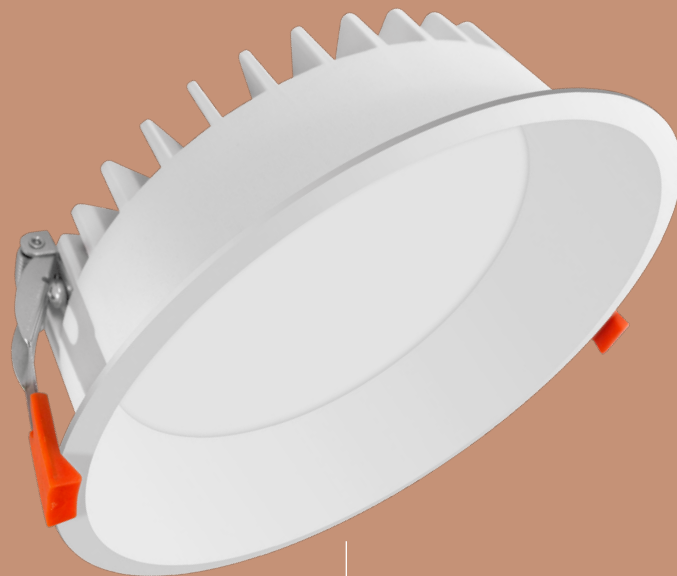


LED
High performance MP LED.
Low light decay. Uniform light flux.



PA diffuser.
Technical thermoplastic that offers an optimal combination of mechanical resistance and high resistance to thermal deformation.



Opening angle 102°.



Lighting option CCT.

TR, Dali DT8 color temperature regulation option.



Photobiological risk 0.

The photobiological risk is the factor that indicates the possible risk of ocular damage caused by an LED light source.



Driver

Ripple <5%
THD <20%
FLICKER FREE



LCS CASAMBI driver option.

Lighting control and management.



DALI 2.0 driver option.

DALI 2 is the certification program based on the latest version of the DALI protocol.



Optimized design for better heat dissipation and guarantee the best performance in aluminum injection.



Textured color finish.

White (01) / black (02), other RAL colors on request.



5 year warranty.


COMPACT S2

REFERENCES GENERATOR

REF.PRODUCT	COLOUR	POWER (W)	COLOUR TEMP.	SYSTEM	OPTICS	DRIVER	ACCESSORIES
S2701B	01 (White)	20 (20 W)	83 (3000 K) CRI>80	-	- Without secondary optics 102°	- ON / OFF Standard	-
	02 (Black)	30 (30 W)	84 (4000 K) CRI>80			DRD Dali 2.0 dimmable driver	
			CCT (2700 K / 5000K) CRI>80			TR Dali DT8 colour temperature control (CCT)	
			93 (3000 K) CRI>90			LCS CASAMBI	
		94 (4000 K) CRI>90					
S2701B	01	20	83	-	-	DRD	-

Example configuration **S2701B012083DRD**

INSTALLATION



COLOURS

 **WHITE** (O1)

 **BLACK** (O2)

*Other RAL colours on request.



SYSTEM FLOW ACCORDING TO OPTICAL VERSION

*Other RAL colours on request.


3000K / CRI>80			4000K / CRI>80			3000K / CRI>90			4000K / CRI>90		
W LED	Lm. LED	Lm. System	W LED	Lm. LED	Lm. System	W LED	Lm. LED	Lm. System	W LED	Lm. LED	Lm. System
20	2241	1671	20	2490	1857	20	2016	1503	20	2241	1671
30	3361	2507	30	3735	2786	30	3024	2256	30	3361	2507

DIMENSIONS

COMPACT S2 220 Ø mm

 205 Ø mm

20 / 30 W

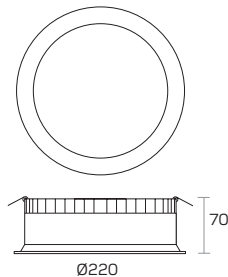





LCS CASAMBI


When it comes to managing and controlling lighting, ease of use by the user must be paramount.

Based on this premise, at Secom we offer you the LCS Casambi integrated system, this system allows the end user to control and manage all the lighting wirelessly (Bluetooth 4.0) from the free Casambi app, available on both Android and IOS and with bluetooth communication.


The app allows you to create rooms, switch on, switch off and dim the lighting at any time with a single touch of the screen.

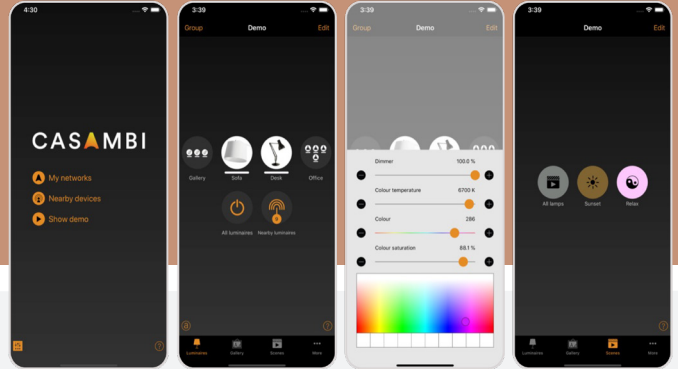

Lighting configuration with **LCS CASAMBI** solution

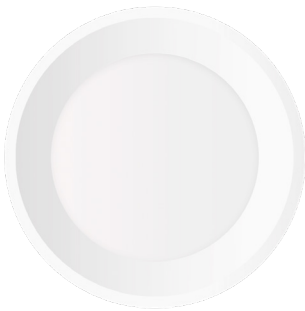

LCS CASAMBI POWER SUPPLY
Example Ref. **S2701B012083LCS**

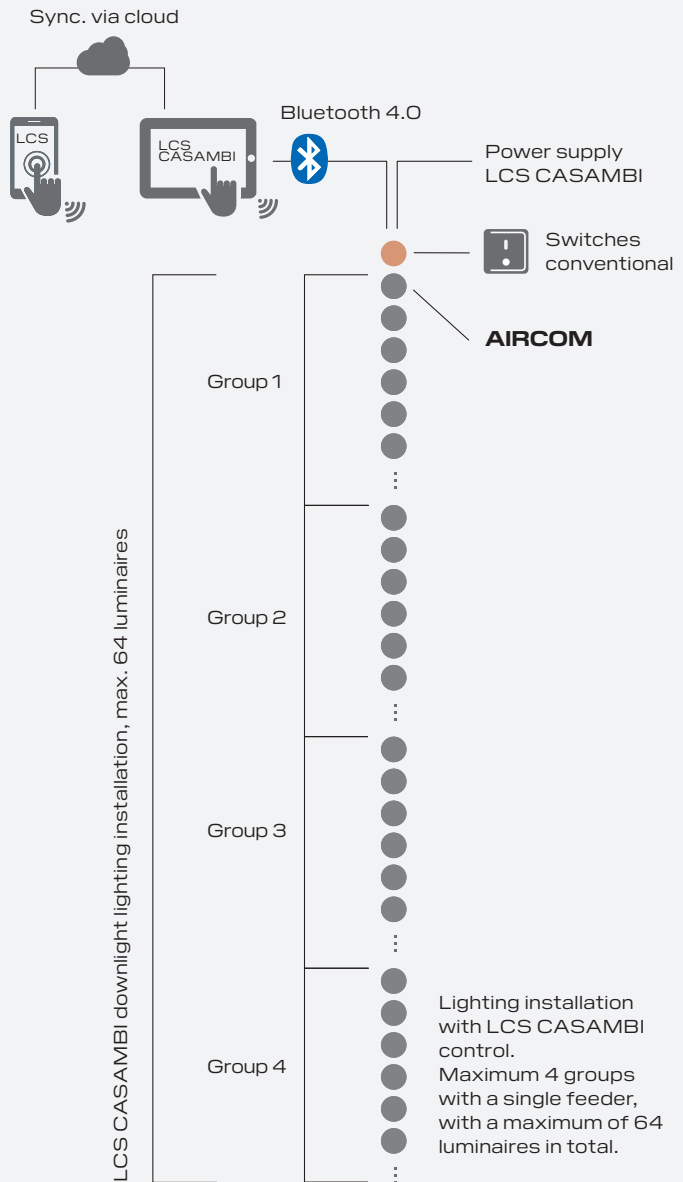

OPTIONS
Point to point (on request/economic study).
Tailor-made grouping (under study).



secom

LIVE THE
LIGHT

Polígono Industrial La Estrella
Calle Marte, 18-21
30500 Molina de Segura
Murcia / Spain

+34 968 80 12 11
www.secom.es