


secom



VALO
downlight

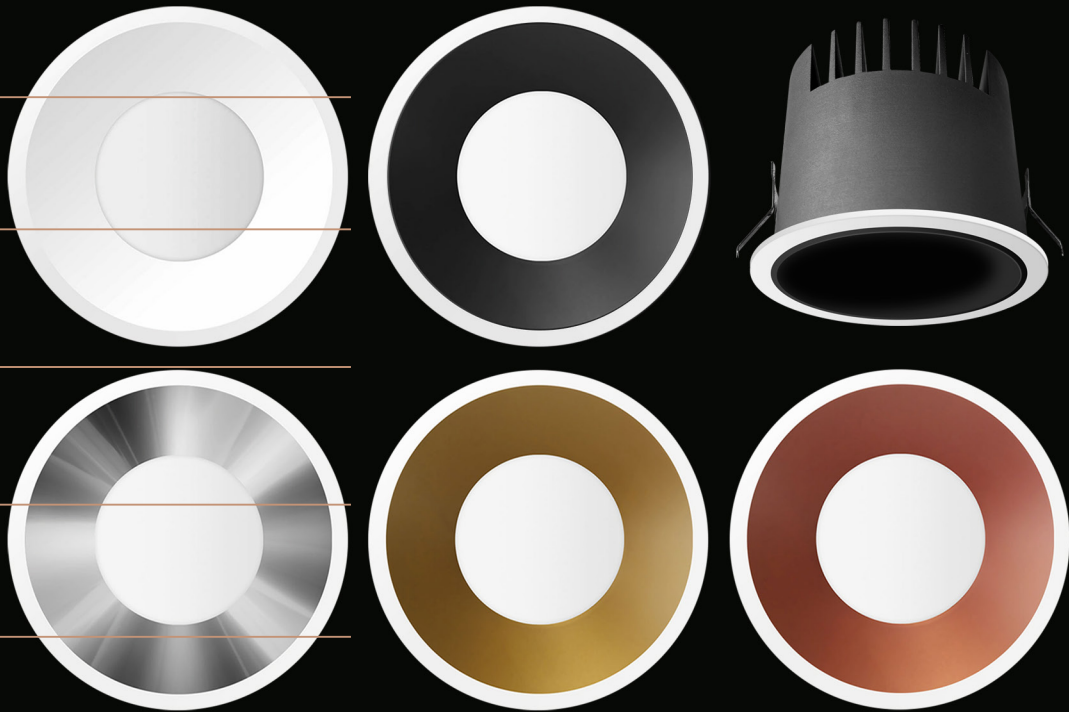

TECHNOLOGY AND INNOVATION

VALO, downlight con un excelente confort visual, gracias a su bajo índice de deslumbramiento UGR<19.

Luminaria cónica, perfecta para los que buscan una luminaria con un diseño moderno y altas prestaciones, como puede ser su regulación DALI 2.0, luminaria con grado de estanqueidad IP44/20 y con la posibilidad de diferentes acabados de color.




















VALO

DOWNLIGHT



High-performance, high-performance luminaire.

Designed to offer high visual comfort and the possibility of various colour configurations, combining outer ring and reflector.

																
COB	220-240V	50-60 HZ	11 16 26	DRIVER INCLUDED	OPTIONAL	>80	IP44/20	2700K 3000K 4000K	2 OPTICS	<19 (11-16W) >20 (26W)	<0,95	0	CLASS II	50.000 H L80B10	-20° +35°	S 0,205 M 0,240 L 1,500



FEATURES



COB latest technology, with high quality colour rendering and light uniformity.



PMMA lens, offering a perfect light distribution.



Aperture angle for **11 / 16w - 25°**.
Aperture angle for **26w - 90°**.



Optimised design, mejorando la disipación de calor y garantizar el mejor rendimiento en inyección de aluminio.



Photobiological risk 0.
Photobiological risk is the factor indicating the possible risk of eye damage caused by an LED light source.



Driver
Ripple <5%
THD <20%
FLICKER FREE



CASAMBI LCS driver option.
Lighting control and management.



DALI 2.0 driver option.
DALI 2 is the certification programme based on the latest version of the DALI protocol.



5-year guarantee.

VALO

REFERENCE GENERATOR

REF.PRODUCT	RING COLOUR	INT. COLOUR	POWER (W)	TEMP.COLOUR	SYSTEM	OPTICS	DRIVER	ACCESSORIES
S3704B	01 (White)	01 (White)	11 (11 W) S	827 (2700 K)	-	- Without secondary optics 25° (S / M)	- ON / OFF Standard	-
	02 (Black) L only with black interior	02 (Black)	16 (16 W) M	83 (3000 K)	-	- Without secondary optics 90° (L)	DRD Driver regul. Dali 2.0	-
		00 (Aluminium met.)	26 (26 W) L	84 (4000 K)	-	-	LCS CASAMBI	-
		33 (Gold)						
		75 (Copper)						
S3704B	01	33	16	83	-	-	DRD	-

Example configuration **S3704B01331683DRD**

* The interior colours (white / aluminium / gold / copper) are only available with a white ring.

COMPLEMENTS

SKE1 Emergency kit 1 h. autonomy (Without Autotest)

SKE3 Emergency kit 3 h. autonomy (Without Autotest)


SOTR0303 Emergency kit 3 h. autonomy (Self-test) Class II

*sensors: see external sensors diptych or sensors catalogue section.


SYSTEM FLOW ACCORDING TO OPTICAL VERSION

*Tolerances: +7% LED flux / +- 10% luminaire power


2700K / CRI>80			3000K / CRI>80			4000K / CRI>80		
W	Lm. LED	Lm. System	W	Lm. LED	Lm. System	W	Lm. LED	Lm. System
11	1151	1080	11	1212	1137	11	1272	1193
16	1686	1581	16	1775	1665	16	1863	1748
26	2747	1791	26	2892	1886	26	3045	1986

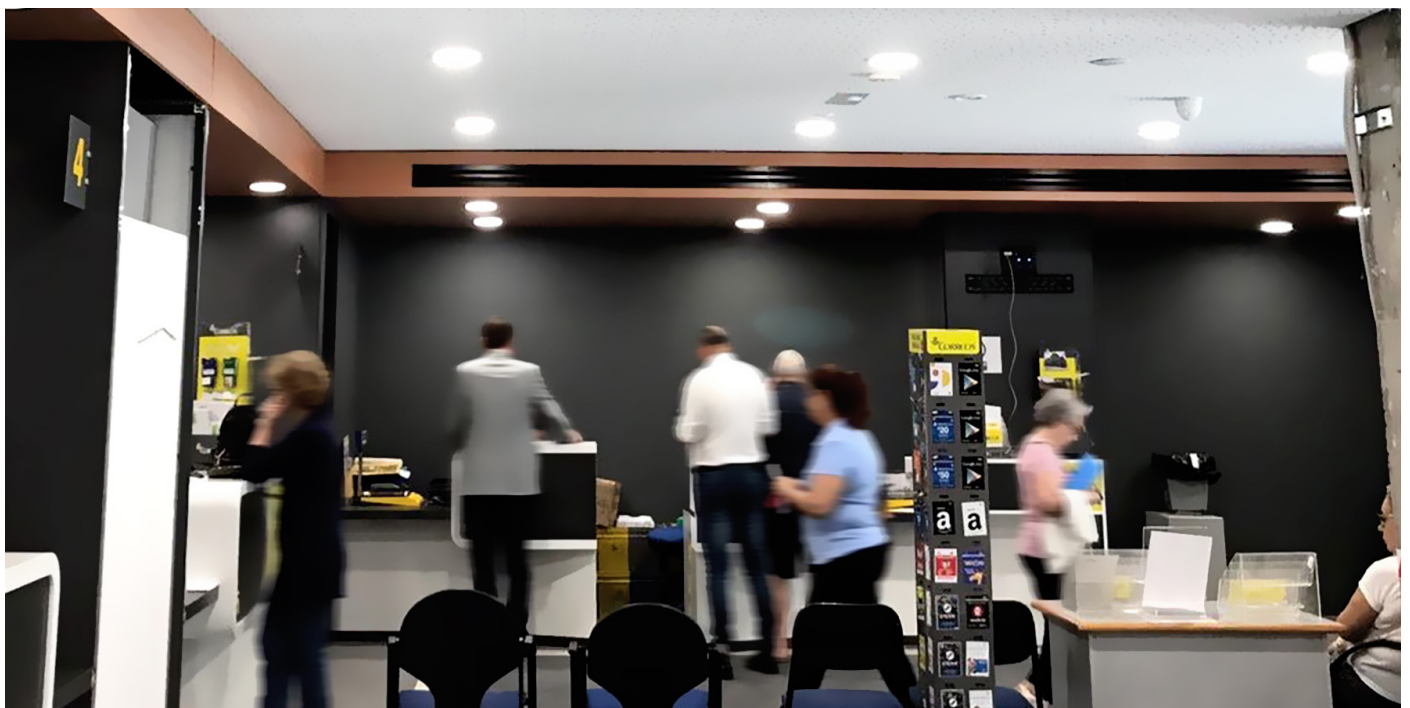

COLOUR COMBINATION



S/M/L
White (01)
White (01)



S/M/L
White (01)
Aluminium M. (00)




S/M/L
White (01)
Gold (33)



S/M/L
White (01)
Copper (75)






S/M/L
White (01)
Black (02)





L
Black (02)
Black (02)



DIMENSIONS




S



M

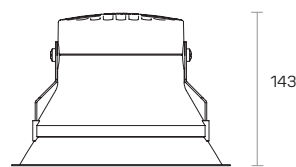

L

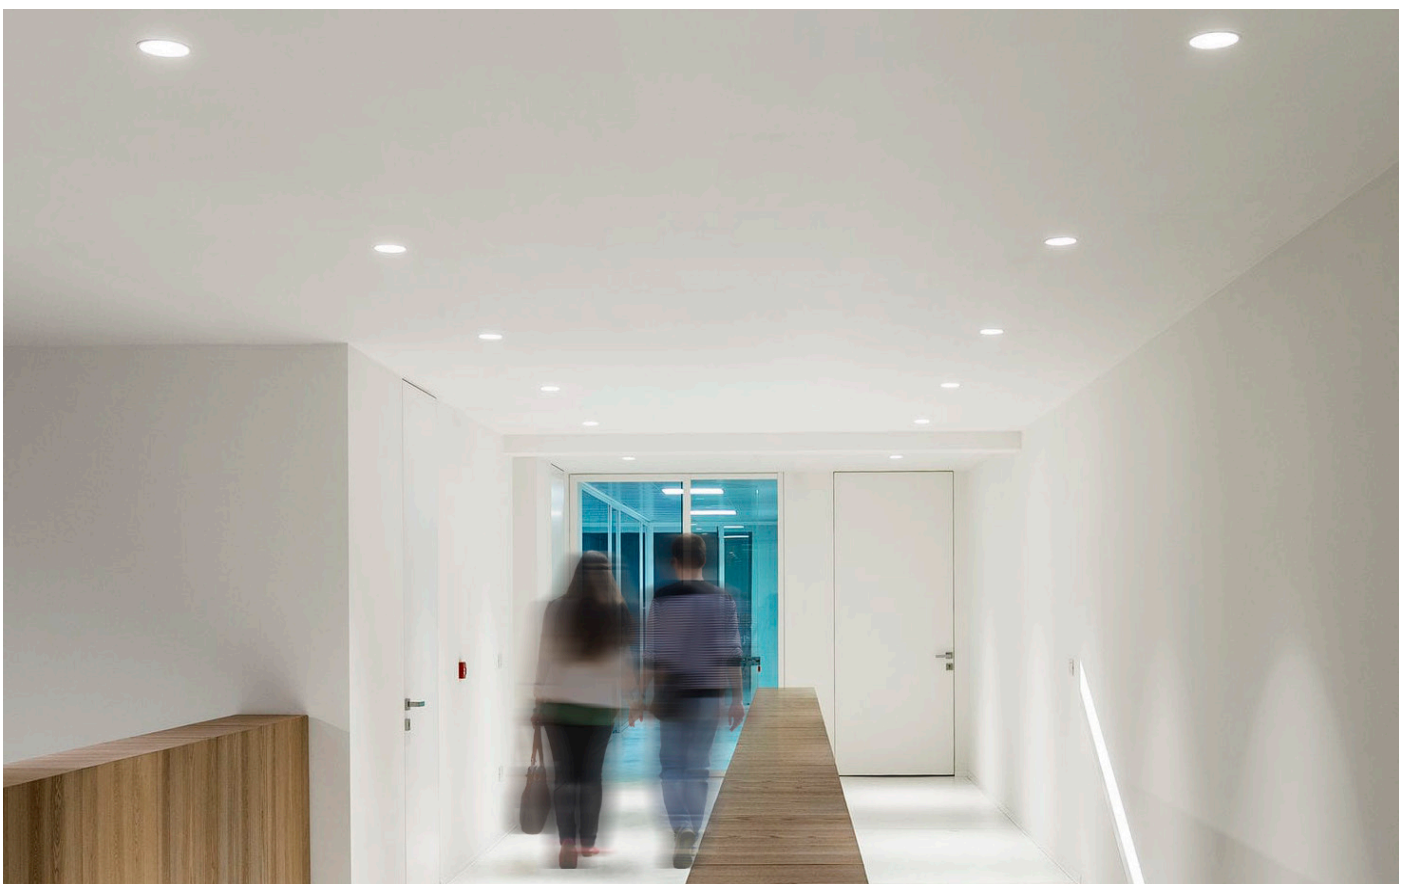


LCS CASAMBI

When it comes to managing and controlling lighting, ease of use by the user must be paramount.

Based on this premise, at Secom we offer you the LCS Casambi integrated system, this system allows the end user to control and manage all the lighting wirelessly (Bluetooth 4.0) from the free Casambi app, available on both Android and IOS and with bluetooth communication.


The app allows you to create rooms, switch on, switch off and dim the lighting at any time with a single touch of the screen.

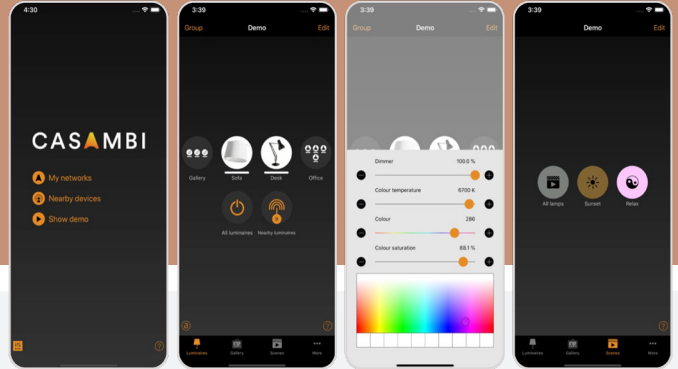

Configuración iluminación con solución **LCS CASAMBI**



ALIMENTADOR LCS CASAMBI
Ejemplo Ref. **S3704B01332683LCS**

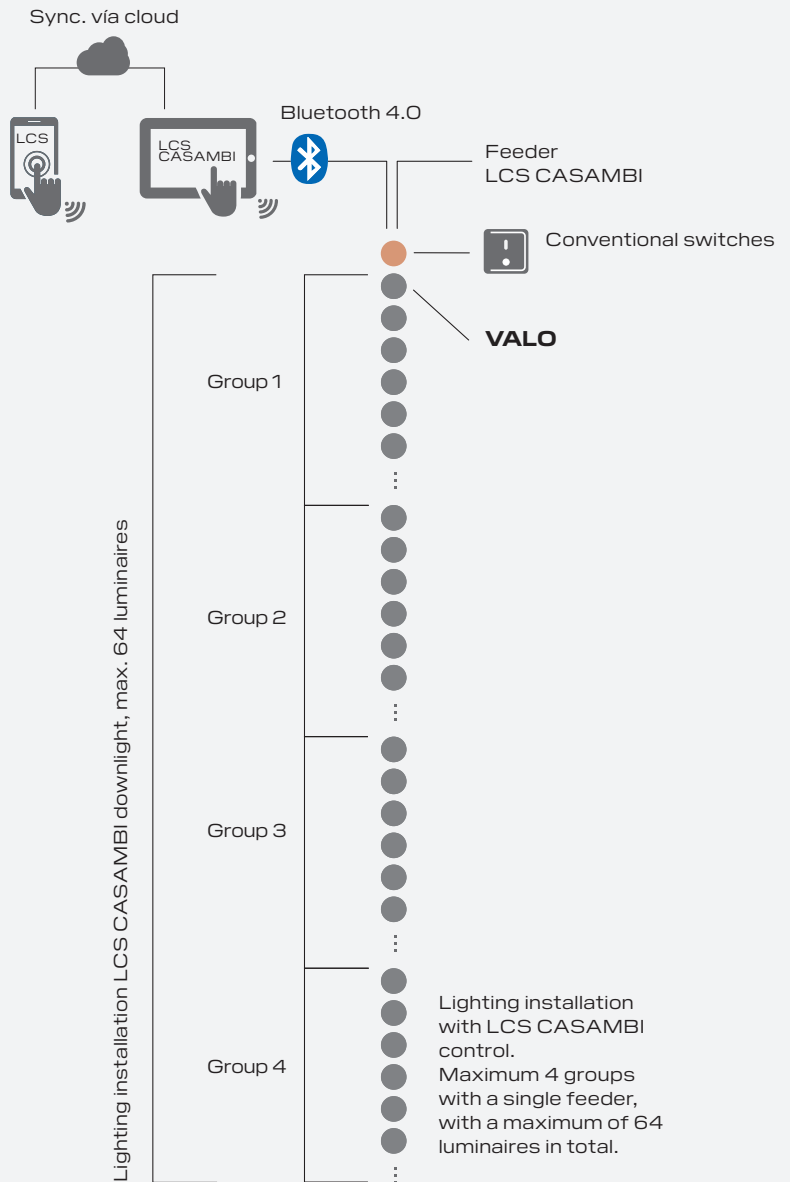

OPTIONS
Point to point (on request/economic study).
Tailor-made grouping (under study).

secom

LIVE THE
LIGHT

Polígono Industrial La Estrella
Calle Marte, 18-21
30500 Molina de Segura
Murcia / Spain

+34 968 80 12 11
www.secom.es