



Downlight LED

# Aircom Supra LED

circular empotrable / circular recessed

IP44 / IP65

**secom**  
here comes the light



Aircom Supra LED es un downlight circular de alta potencia, ideal para la iluminación general de oficinas y establecimientos comerciales donde se requiera un nivel de luz elevado.

De gran rendimiento lumínico, Aircom Supra LED es el resultado de la investigación e innovación de Secom Iluminación. Incorpora la última tecnología de semiconductores Osram Duris E5 instalados cenitalmente en luminaria, que unido a nuestro diseño y sistema de distribución de la luz, da lugar a una luminaria perfecta para la aplicación en cualquier superficie en gran altura.

Ha sido diseñado pensando también en la opción de sustituir los downlights de halogenuros metálicos, gracias a su tamaño de corte de techo estándar y a las múltiples opciones disponibles.

Aircom Supra LED fabricado íntegramente en aluminio inyectado, optimiza la disipación de calor que garantiza el mantenimiento constante de su nivel lumínico a lo largo de su vida útil. Dotado de un novedoso cierre que proporciona una iluminación homogénea en toda su superficie y un alto rendimiento, con un excelente confort visual debido a su reducido UGR y a la posibilidad de IRC superior a 90.

Para instalar en todo tipo de techos desmontables, techos técnicos, escayola y pladur. Posibilidad de instalar en exterior bajo pedido (ref: IP65) e incluso en áreas costeras con alto nivel de salinidad con una protección especial de ambiente marino (Ref. AM)

Existe la posibilidad de gran variedad de acabados, temperaturas de color, así como la incorporación de drivers regulables y sensores para adaptarse al cumplimiento del CTE.

Aircom Supra LED is a high power circular downlight, ideal for use in office and commercial establishments where a high level of light is required.

High light output, Aircom Supra LED is the result of research and development in Secom Iluminacion. It incorporates the latest Osram Duris E5 semiconductor technology, installed in a zenithal way along the luminaire, that together with our design and system of distribution of the light, resulting in a perfect luminaire for application on any surface in high altitude.

It has been designed also considering the option to replace metal halide downlights with its standard ceiling trim size and many options available.

Aircom Supra LED is entirely made in aluminum, optimizes heat dissipation ensuring the constant maintenance of their light level throughout its life. Equipped with an innovative closure that provides uniform illumination over the whole surface and high performance with excellent visual comfort due to its low UGR.

To install on all types of removable ceilings, technical ceilings, plaster and plasterboard. Possibility of installing outdoor upon request (ref: IP65) and even in coast areas with high salinity level with a special marine environment protection (ref: AM)

It is available in such a big variety of finishes, color temperatures as well as adjustable incorporating drivers and sensors to match the CTE compliance.

Aircom Supra LED 20w / Aircom Supra LED 20w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 20 84	Blanco / White	2677	20w
4227 02 20 84	Negro / Black	2677	20w
4227 03 20 84	Dorado / Gold	2677	20w
4227 05 20 84	Cromo / Chrome	2677	20w
4227 33 20 84	Dorado mate / Matt Gold	2677	20w
4227 52 20 84	Cromo mate / Matt Chrome	2677	20w
4227 55 20 84	Niquel mate / Nickel	2677	20w
4227 57 20 84	Niquel rayado / Nickel matt	2677	20w
4227 80 20 84	Satinado / Satin	2677	20w
4227 90 20 84	Titanio / Titanium	2677	20w

\* Se suministra de manera estándar con LED 4000° K.  
\* Standardly supplied with 4000° K LED lamp.

Aircom Supra LED 60w / Aircom Supra LED 60w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 60 84	Blanco / White	8026	60w
4227 02 60 84	Negro / Black	8026	60w
4227 03 60 84	Dorado / Gold	8026	60w
4227 05 60 84	Cromo / Chrome	8026	60w
4227 33 60 84	Dorado mate / Matt Gold	8026	60w
4227 52 60 84	Cromo mate / Matt Chrome	8026	60w
4227 55 60 84	Niquel mate / Nickel	8026	60w
4227 57 60 84	Niquel rayado / Nickel matt	8026	60w
4227 80 60 84	Satinado / Satin	8026	60w
4227 90 60 84	Titanio / Titanium	8026	60w

\* Se suministra de manera estándar con LED 4000° K.  
\* Standardly supplied with 4000° K LED lamp.

Aircom Supra LED 30w / Aircom Supra LED 30w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 30 84	Blanco / White	3395	30w
4227 02 30 84	Negro / Black	3395	30w
4227 03 30 84	Dorado / Gold	3395	30w
4227 05 30 84	Cromo / Chrome	3395	30w
4227 33 30 84	Dorado mate / Matt Gold	3395	30w
4227 52 30 84	Cromo mate / Matt Chrome	3395	30w
4227 55 30 84	Niquel mate / Nickel	3395	30w
4227 57 30 84	Niquel rayado / Nickel matt	3395	30w
4227 80 30 84	Satinado / Satin	3395	30w
4227 90 30 84	Titanio / Titanium	3395	30w

\* Se suministra de manera estándar con LED 4000° K.  
\* Standardly supplied with 4000° K LED lamp.

Aircom Supra LED 40w / Aircom Supra LED 40w




Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 40 84	Blanco / White	5556	40w
4227 02 40 84	Negro / Black	5556	40w
4227 03 40 84	Dorado / Gold	5556	40w
4227 05 40 84	Cromo / Chrome	5556	40w
4227 33 40 84	Dorado mate / Matt Gold	5556	40w
4227 52 40 84	Cromo mate / Matt Chrome	5556	40w
4227 55 40 84	Niquel mate / Nickel	5556	40w
4227 57 40 84	Niquel rayado / Nickel matt	5556	40w
4227 80 40 84	Satinado / Satin	5556	40w
4227 90 40 84	Titanio / Titanium	5556	40w

\* Se suministra de manera estándar con LED 4000° K.  
\* Standardly supplied with 4000° K LED lamp.

Opcionalmente se pueden suministrar con:  
Optionally can be supplied with:

Ref. DR	Driver regulable 1-10V / Driver dimmable 1-10V
Ref. DRD	Driver regulable Dali / Driver dimmable Dali
Ref. DM8	Detector de movimiento / Motion detector
Ref. 3416	Kit de emergencia / Emergency kit
Ref. AM	Pintura especial ambiente marino / Special marine environment paint
Ref. CT	Cierre transparente / Close transparent
Ref. CF23	Mini control de flujo / Mini flux control

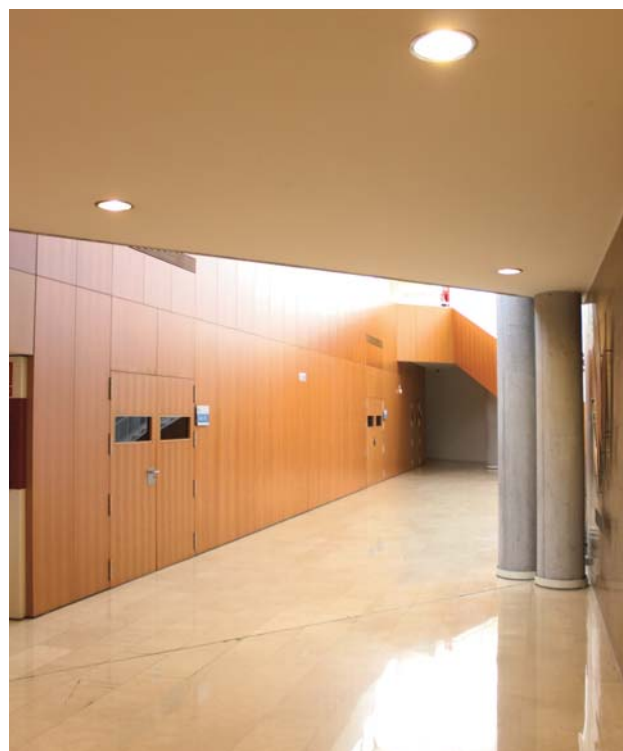

LEDs para alimentación / LEDs food  
Realza y da vida a los alimentos / It enhances and enlivens food

Incremento respecto a la lámpara / Rough price increase of lamp

Ref. LPF	LEDs Pescado / Fish - 4000K - CRI>90
Ref. LPB	LEDs Pan / Bread - 3000K - CRI>90
Ref. LCM	LEDs Carne / Meat - 2700K - CRI>90
Ref. LVV	LEDs Verd. y fruta / Veg. and fruit - 4000K - CRI>90

OPCIONES / OPTIONS LED	Ref. 83	Ref. 84	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°K	4000°K	5700°K
Lum 20w	2600	2677	2677
Lum 30w	4064	4074	4074
Lum 40w	5543	5556	5556
Lum 60w	8007	8026	8026



Aircom Supra IP65 LED 20w / Aircom Supra IP65 LED 20w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 20 84 IP65	Blanco / White	2677	20w
4227 02 20 84 IP65	Negro / Black	2677	20w
4227 33 20 84 IP65	Dorado mate / Matt Gold	2677	20w
4227 52 20 84 IP65	Cromo mate / Matt Chrome	2677	20w
4227 90 20 84 IP65	Titanio / Titanium	2677	20w

\* Se suministra de manera estándar con LED 4000° K.  
 \* Standardly supplied with 4000° K LED lamp.

Aircom Supra IP65 LED 40w / Aircom Supra IP65 LED 40w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 40 84 IP65	Blanco / White	5556	40w
4227 02 40 84 IP65	Negro / Black	5556	40w
4227 33 40 84 IP65	Dorado mate / Matt Gold	5556	40w
4227 52 40 84 IP65	Cromo mate / Matt Chrome	5556	40w
4227 90 40 84 IP65	Titanio / Titanium	5556	40w

\* Se suministra de manera estándar con LED 4000° K.  
 \* Standardly supplied with 4000° K LED lamp.

Aircom Supra IP65 LED 30w / Aircom Supra IP65 LED 30w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 30 84 IP65	Blanco / White	3395	30w
4227 02 30 84 IP65	Negro / Black	3395	30w
4227 33 30 84 IP65	Dorado mate / Matt Gold	3395	30w
4227 52 30 84 IP65	Cromo mate / Matt Chrome	3395	30w
4227 90 30 84 IP65	Titanio / Titanium	3395	30w

\* Se suministra de manera estándar con LED 4000° K.  
 \* Standardly supplied with 4000° K LED lamp.

Aircom Supra IP65 LED 60w / Aircom Supra IP65 LED 60w



Incluye driver y lámparas LED / Includes driver and LED lamp

Ref.	Color / Colour	Lúmenes	W
4227 01 60 84 IP65	Blanco / White	8026	60w
4227 02 60 84 IP65	Negro / Black	8026	60w
4227 33 60 84 IP65	Dorado mate / Matt Gold	8026	60w
4227 52 60 84 IP65	Cromo mate / Matt Chrome	8026	60w
4227 90 60 84 IP65	Titanio / Titanium	8026	60w

\* Se suministra de manera estándar con LED 4000° K.  
 \* Standardly supplied with 4000° K LED lamp.

Opcionalmente se pueden suministrar con:  
 Optionally can be supplied with:

Ref. <b>DR</b>	Driver regulable 1-10V / Driver dimmable 1-10V
Ref. <b>DRD</b>	Driver regulable Dali / Driver dimmable Dali
Ref. <b>DM8</b>	Detector de movimiento / Motion detector
Ref. <b>3416</b>	Kit de emergencia / Emergency kit
Ref. <b>AM</b>	Pintura especial ambiente marino / Special marine environment paint
Ref. <b>CT</b>	Cierre transparente / Close transparent
Ref. <b>CF23</b>	Mini control de flujo / Mini flux control

OPCIONES / OPTIONS LED	Ref. 83	Ref. 84	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°K	4000°K	5700°K
Lum 20w	2600	2677	2677
Lum 30w	4064	4074	4074
Lum 40w	5543	5556	5556
Lum 60w	8007	8026	8026





## Aircon Supra LED

Rápida instalación.

Sustituye el downlight HQI de 70w por el Aircom Supra LED de 40w y el downlight HQI de 150w por el Aircom Supra de 60w.



Quick installation.

Aircon Supra LED 40w downlight replaces 70w HQI downlight, and Aircom Supra LED 60w downlight replaces 150w HQI downlight.

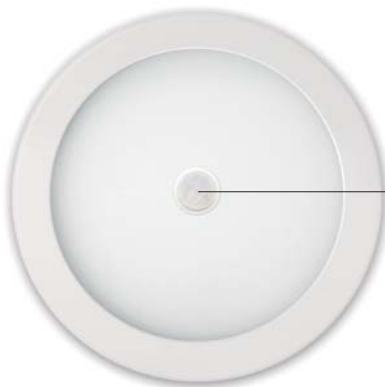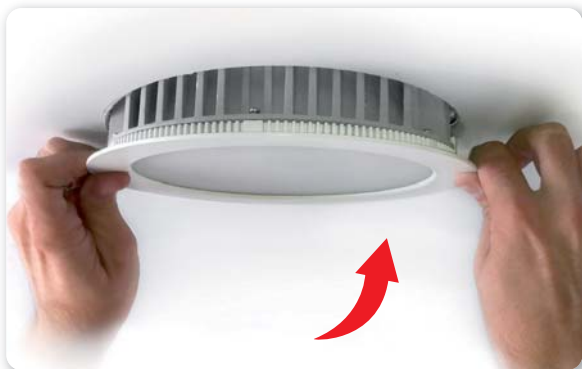

Ref. **DM8**  
Opcional detector de movimiento en luminaria  
**Optional with motion detector luminaire**

Ref. **CF23**  
Opcional mini control de flujo (la luminaria debe incorporar driver regulable 1-10V)  
**Optional mini flux control (the luminaire must incorporate dimmable 1-10V)**



## Color / Colour



IP44 / IP65  
Blanco  
White  
(01)

IP44 / IP65  
Negro  
Black  
(02)

IP44  
Dorado  
Gold  
(03)

IP44  
Cromo  
Chrome  
(05)

IP44 / IP65  
Dorado mate  
Matt gold  
(033)

IP44 / IP65  
Cromo mate  
Matt chrome  
(052)

IP44  
Niquel mate  
Nickel  
(055)

IP44  
Niquel rayado  
Matt nickel  
(057)

IP44  
Satinado  
Satin  
(080)

IP44 / IP65  
Titanio  
Titanium  
(090)



### Los beneficios de las luminarias de LEDs de secom.

- Ahorro energético por su alta eficiencia.
- Ahorro en mantenimiento de luminarias.
- Reproducción cromática (IRC) 80.
- Amplia gama en temperaturas de color.
- Amplia gama de medidas y de colores.
- Posibilidad de regular las luminarias.
- Ópticas de alto rendimiento.
- Fácil montaje e instalación.

### ¿Por qué trabajar con secom?


- Fabricación nacional de todas sus luminarias de LEDs.
- Disponibilidad de todos los componentes de las luminarias de LEDs (disipadores, LEDs, circuitos, drivers, etc) para reposición.
- El mejor servicio en luminarias de LEDs, debido a la fabricación nacional y al gran stocks de componentes.
- Gran versatilidad en diseño, posibilidad de personalizar luminarias.
- Productos que cumplen la normativa europea vigente.
- Componentes Osram Duris E5.
- Estricto control de calidad.
- Gran inversión en I+D+i para el desarrollo de flujos lumínicos y tecnologías de disipación de temperatura.
- PCB con fechador para verificar la vida media útil garantizada.

### The benefits of secom LED lighting fittings.

- Energy-saving because of his high efficiency.
- Saving in maintenance.
- Cromatic reproduction (ICR) 80.
- Wide range of colour temperature.
- Wide range of measures and colours.
- Possibility of dimming the lighting fitting.
- High output optics.
- Easy installation.

### Why should you work with secom?

- Own production of all our LED light fitting.
- Availability of all components of LEDs fittings (heat sink, LEDs, drivers, etc.) for replacement.
- The best service in the LEDs fitting due to the production in our own production plants of and a large stock of components.
- Flexibility in design and possibility of customize the fittings.
- The products comply with European standards.
- Components are Osram Duris E5.
- Strict quality control.
- Big investment in R&D on development of luminus fluxes and temperature dissipation technologies.
- PCB with its production date for life span control.

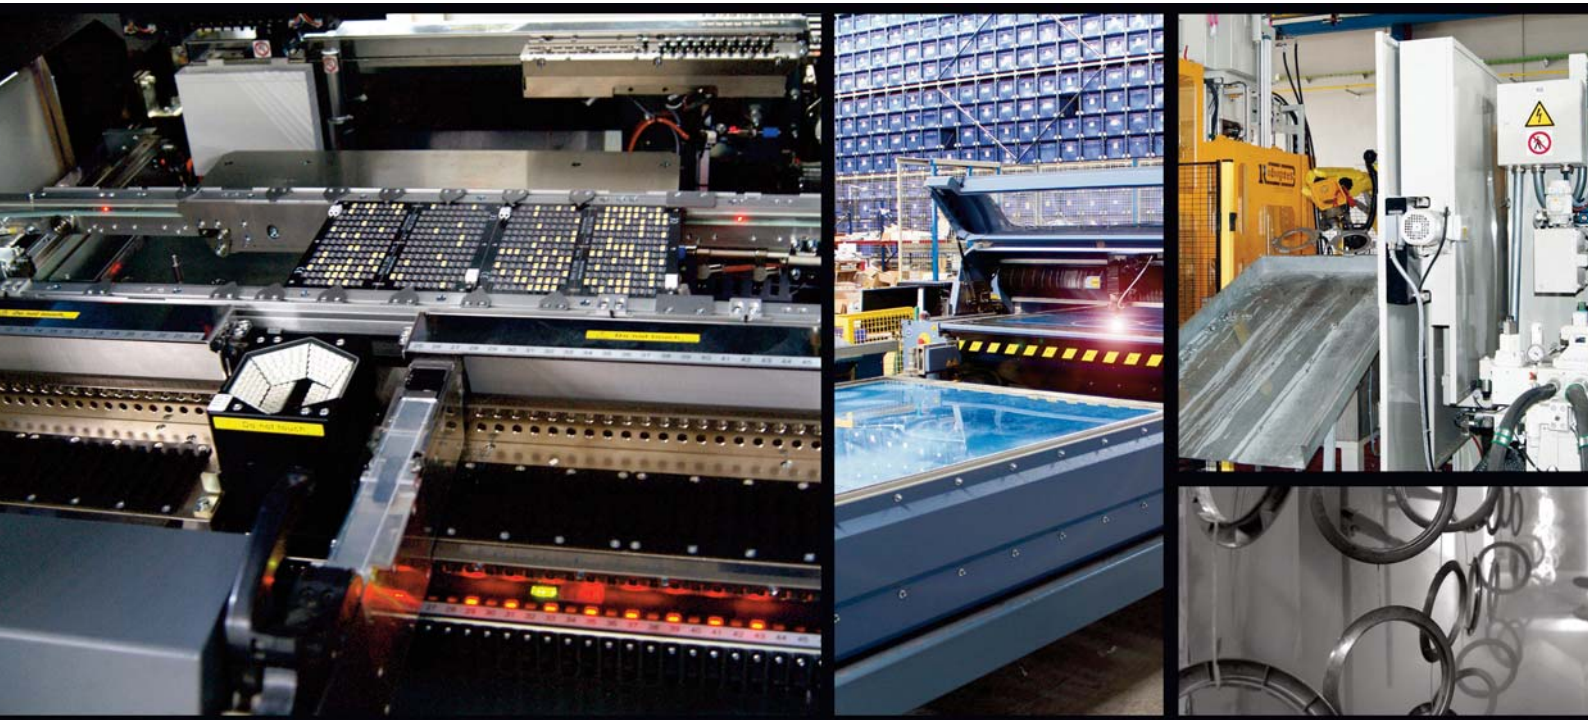

Polígono Industrial la Estrella. C/ Marte 18-21  
0500 Molina de Segura (Murcia) Spain - Buzón de correos nº11  
Tlf.: 968 80 12 11 - Fax.:968 89 10 48 - [secom@secom.es](mailto:secom@secom.es)  
**Dpto.Exportación.** Tlf.: ++34-968-80 18 00. Fax.: ++34-968-89 10 48  
[export@secom.es](mailto:export@secom.es)



ficha técnica



[www.secom.es](http://www.secom.es)

